




H05RNH2-F Illumination Flat Cable

Application: This cable is used in dry, humid and wet locations, as well as outdoors as a clamping cable for standardised lamp holders for the illumination of spaces and gardens.

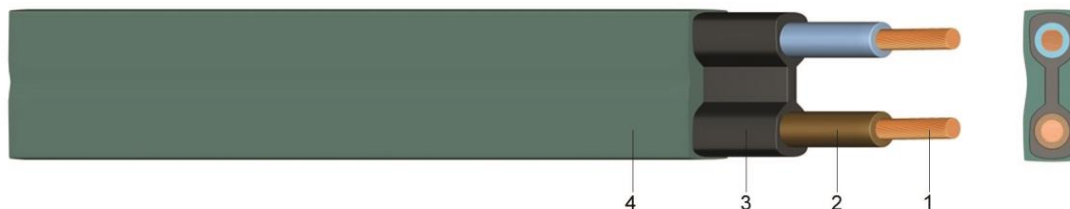

Construction:

- 1 fine-stranded tinned copper
- 2 ethylene propylene rubber (NR) or styrene-butadiene rubber (SBR) insulation
- 3 polychloroprene (CR) inner sheath
- 4 polychloroprene (CR) outer sheath, green

Standards:

- DIN VDE 0285-525-2-82
- DIN EN 60228 class 5 (construction)
- HD 22.6 S2:1994+A1:1999+A2:2004

Technical data:

Nominal voltage U ₀ /U	[V]	300 / 500 Volt
Test voltage	[V] _{ac}	2000
Temperature range	in motion	-25°C till +50°C
Operating temperature	short circuit	200°C
Short circuit time	max.	[sec]
Bending radius	min.	x diameter
Flammability	standard	EN 60332-1-2

Number of cores and nominal cross section mm ²	from stock	Copper figure kg/km	Cond. construction (appr. value) mm	Overall measures appr. mm	Weight appr. kg/km
2 x 1,5	●	30	30 x 0,26	6,0 x 14,0	130
2 x 2,5	○	50	50 x 0,26	6,5 x 14,5	145