




NHXMH

Halogen-Free Sheathed Wire with Improved Fire Behaviour

Application:

To be installed in buildings or industrial plants where many people and goods are concentrated. As they don't develop corrosive and halogen gases under the impact of fire, and the smoke and fume generation is also minimal, the damage caused is much smaller. They are destined for the installation on, in and under the wall-surface in dry, humid and wet locations as well as in brickwork or outdoors (when protected), but not directly into the earth.

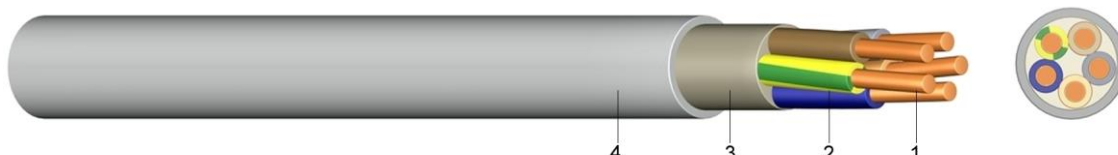

Construction:

- 1 solid or stranded bare copper
- 2 core insulation of cross-linked polyethylene (2X11)
- 3 core covering of a halogen-free filling compound
- 4 outer sheath of halogen-free polymer (HM2), grey

Standards:

DIN VDE 0250-214
 DIN EN 60228 class 1 and 2 (construction)
 HD 308 S2 (core identification)

Technical data:

Nominal voltage U ₀ /U		[V]	300 / 500 Volt
Test voltage		[V] _{Ac}	2000
Temperature range	in motion		-5°C till +70°C
Operating temperature	short circuit	°C	160
Short circuit time	max.	[sec]	5
Bending radius	in motion	x diameter	12
Flammability	standard		EN 50266-2-4 IEC 60332-3 Kat.C

Number of cores and nominal cross section mm ²	from stock J	from stock O	Copper figure kg/km	Cond. construction (appr. value) mm	Overall diameter appr. mm	Calorific potential kWh / m	Weight appr. kg / km
1 x 4	○		40	1 x 2,25	6,0	0,42	105
1 x 6	●		60	1 x 2,76	6,4	0,44	150
1 x 10 RE	○		100	1 x 3,56	7,4	0,53	200
1 x 16 RM	●		160	7 x 1,70	8,6	0,63	295
2 x 1,5		●	30	1 x 1,38	8,7	0,39	113
2 x 2,5		●	50	1 x 1,38	9,5	0,45	145
2 x 4		●	80	1 x 2,25	11,0	0,59	210
3 x 1,5	●		45	1 x 1,38	9,1	0,43	130
3 x 2,5	●		75	1 x 1,78	9,9	0,50	168
3 x 4	●		120	1 x 2,25	11,2	0,63	234
3 x 6	●		180	1 x 2,76	12,7	0,79	319
3 x 10 RE	○		300	1 x 3,56	15,3	1,09	494
4 x 1,5	●		60	1 x 1,38	9,7	0,50	152
4 x 2,5	●		100	1 x 1,78	10,6	0,58	201
4 x 4	●		160	1 x 2,25	12,5	0,83	296
4 x 6	○		240	1 x 2,76	13,7	0,92	388
4 x 10 RE	○		400	1 x 3,56	16,5	1,29	606
4 x 16 RM	○		640	7 x 1,70	19,4	1,68	917



Number of cores and nominal cross section mm ²	from stock		Copper figure kg/km	Cond. construction (appr. value) mm	Overall diameter appr. mm	Calorific potential kWh / m	Weight appr. kg / km
	J	O					
5 x 1,5	●		75	1 x 1,38	10,4	0,59	177
5 x 2,5	●		125	1 x 1,78	11,5	0,69	241
5 x 4	●		200	1 x 2,25	13,5	0,96	352
5 x 6	●		300	1 x 2,76	15,3	1,16	485
5 x 10 RE	●		500	1 x 3,56	18,0	1,56	731
5 x 10 RM	●		500	7 x 1,35	18,0	1,56	731
5 x 16 RM	●		800	7 x 1,70	22,2	2,23	1.168
7 x 1,5	●		105	1 x 1,38	11,1	0,65	220
7 x 2,5	●		175	1 x 1,78	12,7	0,82	311
12 x 1,5	●		180	1 x 1,38	14,8	1,11	391
3 x 1,5 rot	●		45	1 x 1,38	9,1	0,43	130
3 x 2,5 rot	●		75	1 x 1,78	9,9	0,50	168