




## 2YAFCY

## HF - Coaxial Cable 75 Ohm SAT - Conform

### Application:

Suitable for applications in dry and humid locations as an aerial cable for community- and cable television networks. SAT-conform.

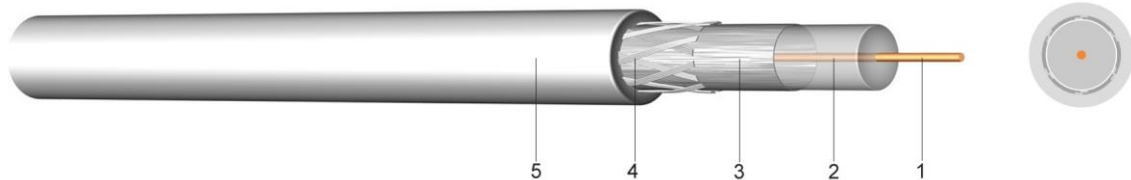

### Construction:

- 1 ..... solid bare copper
- 2 ..... core insulation of polyethylene (Dielectricum)
- 3 ..... static screen of aluminium foil
- 4 ..... wide-meshed tinned copper braiding
- 5 ..... outer sheath of polyvinylchloride (PVC), white

### Technical data:

	in motion		-5°C till +70°C
Temperature range	ZL	[Ohm]	75 +/-3
Impedance	100 Mhz	[dB / 100m]	8,8
Attenuation	300 Mhz	[dB / 100m]	15,0
	450 Mhz	[dB / 100m]	17,5
	DC resistance	inner conductor	[Ohm / km]
	outer conductor	[Ohm / km]	20,0
Bending radius	min.	[mm]	30
Shielding		[dB]	75,0

Type	from stock	Copper figure kg/km	Overall diameter appr.mm	Weight appr. kg / km
2YAFCY 0,75/4,8	●	13	7,0	47