




2YSLCY

EMV Composite Connection Cable with Copper Braiding

Application:

These composite connection cables are produced according to the European EMV Guidelines and are particularly suitable for plants and facilities with appliances and electrical equipment of which electromagnetic interference fields could have an undue influence on the surroundings. These connection cables are well suited for fixed installations and for flexible use in motive power engineering with frequency converting technology (e.g. machine and plant engineering) for medium-level mechanical loads in dry, humid and wet locations.

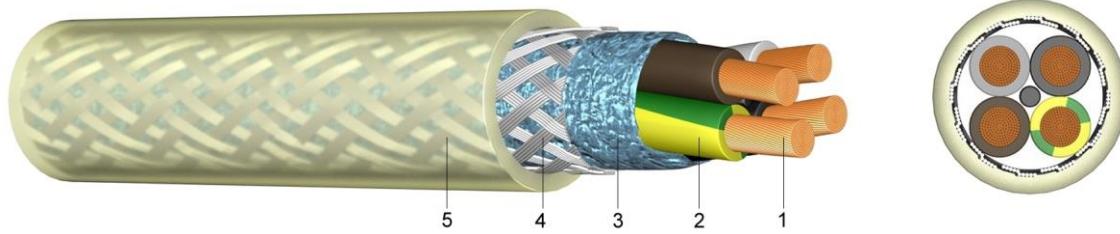

Construction:

- 1 fine-stranded bare copper
- 2 core insulation of polyethylene (PE)
- 3 static screen of aluminium foil
- 4 concentric screen of tinned copper wires
- 5 outer sheath of polyvinylchloride (PVC), transparent

Standards:

- DIN VDE 0285-525-1
- DIN EN 60228 class 5 (construction)
- HD 308 S2 (core identification)
- DIN VDE 0207
- EN 55011

Technical data:

Nominal voltage Uo/U	[V]	600 / 1000 Volt
Test voltage at 50 Hz	[V]AC	4000
	[V]AC	4000
Temperature range		- 5°C till +70°C
		-30°C till +70°C
Operating temperature	°C	160°C
Short circuit time	[sec]	5
Bending radius	x diameter	7,5
	x diameter	15,0
Flammability	standard	EN 60332-1-2

Number of cores and nominal cross section mm ²	from stock	Copper figure kg/km	Wire diameter mm	Overall diameter mm	Weight appr. kg / km
4 x 1,5	●	94	0,26	11,4	170
4 x 2,5	●	156	0,26	13,0	235
4 x 4	●	224	0,31	14,7	320
4 x 6	●	302	0,31	16,7	425
4 x 10	●	490	0,41	20,9	665
4 x 16	○	740	0,41	23,7	970
4 x 25	●	1.063	0,41	28,3	1.400
4 x 35	●	1.563	0,41	32,1	1.890
4 x 50	●	2.188	0,41	38,7	2.700



Number of cores and nominal cross section mm ²	from stock	Copper figure kg/km	Wire diameter mm	Overall diameter mm	Weight appr. kg / km
4 x 70	●	3.329	0,51	43,2	3.480
4 x 95	○	4.489	0,51	48,3	4.848
4 x 120	○	5.320	0,51	53,4	5.660
4 x 150	○	6.650	0,51	59,6	6.930