




SL 808C

Incremental Transmission Cable with Copper Screening and PVC Outer Sheath

Application:

These cables are used as highly flexible connection cables in speedometers, brakes and pulse generators in machine and plant engineering for medium-level mechanical stress in dry, damp and wet locations. These two types show different characteristics in relation to the steering of servomotors. The motor feedback cable is used to regulate motor speed and indicate actual values. The incremental transmission cable controls positioning and processing.

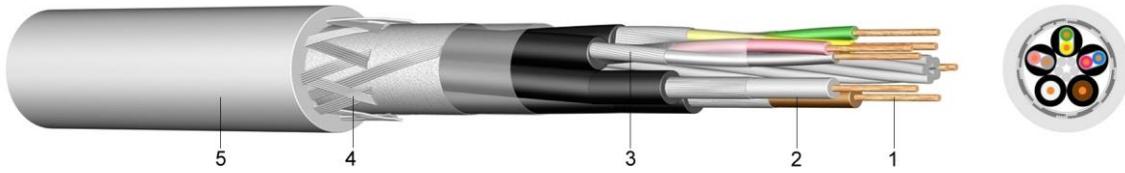

Construction:

- 1 fine-stranded bare copper
- 2 core insulation of polyethylene (PE)
- 3 banding of plastic-concealed Al-foil and braided shield
- 4 screen of tinned copper braiding
- 5 outer sheath of polyvinylchloride (PVC)

Standards:

- in according with DIN 0285-525-1, 0812
 DIN EN 60228 class 5 (construction)
 in according with DIN 47100 (core identification)

Technical data:

Nominal voltage Uo/U	[V]	till 0,38mm ²	350 Volt
	[V]	from 0,50 mm ²	500 Volt
Test voltage	[V] _{AC}		2000
Temperature range	in motion		- 5°C till +70°C
	fixed		-30°C till +80°C
Operating temperature	short circuit	°C	150°C
Short circuit time	max.	[sec]	5
Bending radius	min.	x diameter	7,5
Flammability	standard		EN 60332-1-2

Number of cores and nominal cross section mm ²	from stock	Copper figure	Wire diameter	Overall diameter appr. mm	Weight
					appr. kg / km
4 x 2 x 0,14 + 4x0,5	○	72	0,16/0,21	8,0	96
4 x 2 x 0,25 + 2x1C	○	67	0,16/0,21	9,0	120
4 x 2 x 0,38 + 4x0,5	○	82	0,16/0,21	9,9	145
10 x 0,14 + 2x0,5	○	46	0,11/0,21	8,0	75
10 x 0,14 + 4x0,5	○	60	0,11/0,21	8,2	95
15 x 0,14 + 4x0,5	○	70	0,11/0,21	8,8	140
3 x (2x x 0,14C)+2x(0,5C)	○	86	0,11/0,21	8,0	100