


RG 213 U

Coaxial Cable 50 Ohm

Application:

For indoor installation as well as in industrial areas in conduits and cable ducts, for transmission of high frequency signals and power.

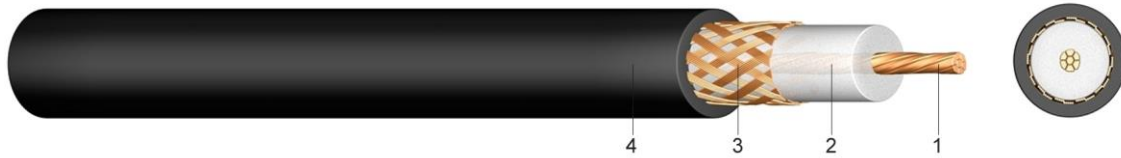

Construction:

- 1 stranded bare copper
construction: 7 x 0,75mm
- 2 core insulation of polyethylene (Dielectricum)
Ø ca. 7,3mm
- 3 screen of bare copper braiding
- 4 outer sheath of polyvinylchloride (PVC), black

Standards:

adapted to US Standard MIL - C - 17

Technical data:

Temperature range	in motion		-5°C till +70°C
Frequency range	F max	[GHz]	3,0
Insulation resistance	R iso	[MΩm/km]	10000
Impedance	ZL	[Ωm]	50 +/-2
Attenuation	100 MHz	[dB / 100m]	6,8
Capacitance	C	[NF / km]	100
Rel. velocity ratio	V rel	%	67,0
Electric strength	50Hz	[KV]eff	10
Bending radius	min.	[mm]	50
Operating peak voltage		[kV]	5,2

Type	from stock	Copper figure kg/km	Overall diameter appr.mm	Weight appr. kg / km
RG 213 U	●	76	10,3	154